

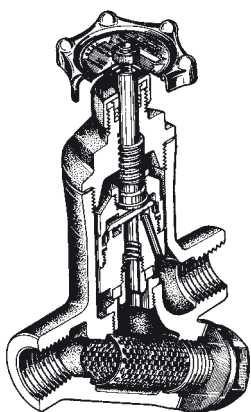





SV




SL



Capacity Charts

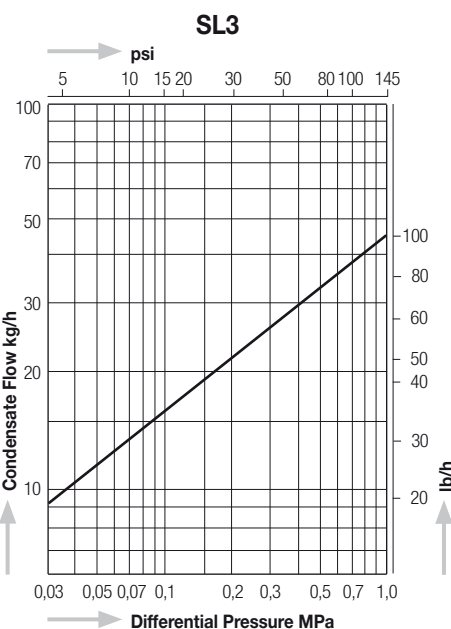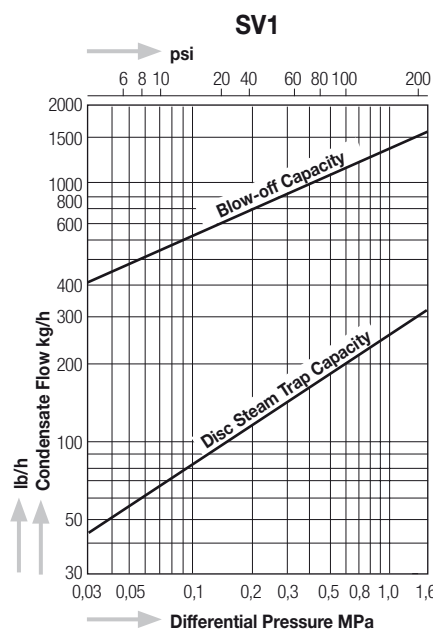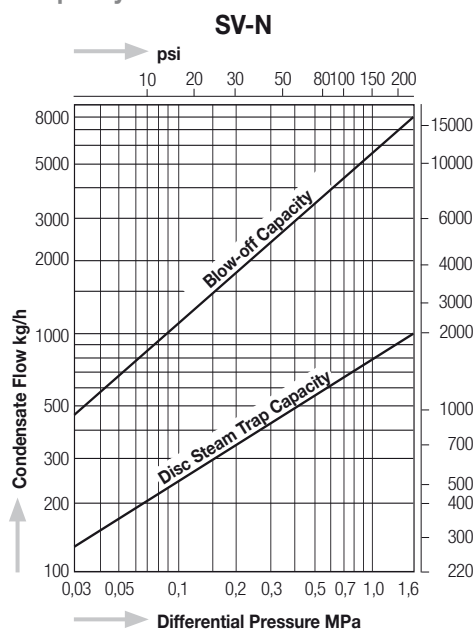

Dimensions

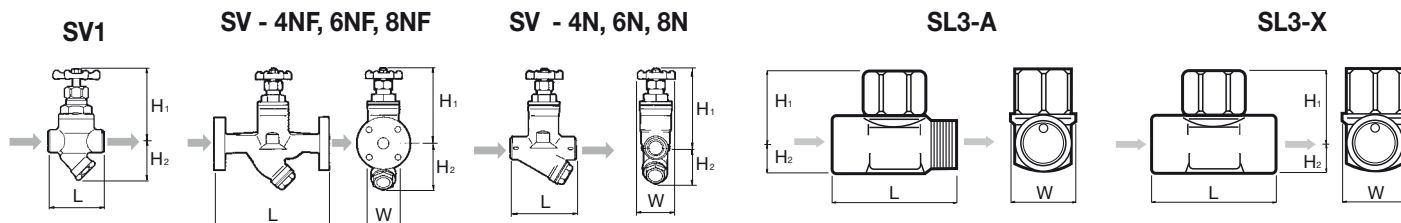

Model	Connections	Size (in)	Operating Pressure Range		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W		kg	lb
SV1	Screwed Rc, NPT	⅜", ½"	0,03 – 1,6	4.4 – 230	220	428	75	105	53	65	3.0	4.1	2.1	2.6	Cast Steel A216WCB	1,0	2.2
		107						4.2				1,2				2.6	
SV -	Screwed Rc, NPT	½"					Cast Iron FC250	2,4	5.3								
		¾"						2,5	5.5								
		1"						2,7	5.9								
	Flanged JIS, ASME, DIN	½"						4,1	9.0								
		¾"						4,7	10.3								
		8NF						1"	5,2	11.5							
								SL3-A	Screwed Rc, NPT	¼"	0,03 – 1,0	4.4 – 145	400	752	40	22	8
SL3-X	Screwed Rc, NPT	¼"	0,03 – 1,0	4.4 – 145	400	752	40		22	8	19	1.6	0.9	0.3	0.7	0,06	0.13