

figure	400
ends form	flanged Y-type

ZETKAMA

CHECK VALVE

body material	nominal pressure	nominal diameter	max. temperature
B nodular cast iron	C 16 bar	DN 50-150	70°C
	B 10 bar	DN 200-400	

*** DN 300-400 on request**



FEATURES

- very slinght pressure drop
- fill bore
- self cleaning
- silent
- horizontal and vertical installation

APPLICATION

- heavy, thick and viscous fluids
- dirty water

Data given can be changed without notice.

Edition 04/2013

ZETKAMA Spółka Akcyjna
ul. 3 Maja 12
PL 57-410 Ścinawka Średnia

tel. +48 74 8652 174
tel. +48 74 8652 100
fax +48 74 8652 199


e-mail marketing@zetkama.com.pl
www.zetkama.com.pl



figure	400
ends form	flanged Y-type

ZETKAMA

MATERIALS

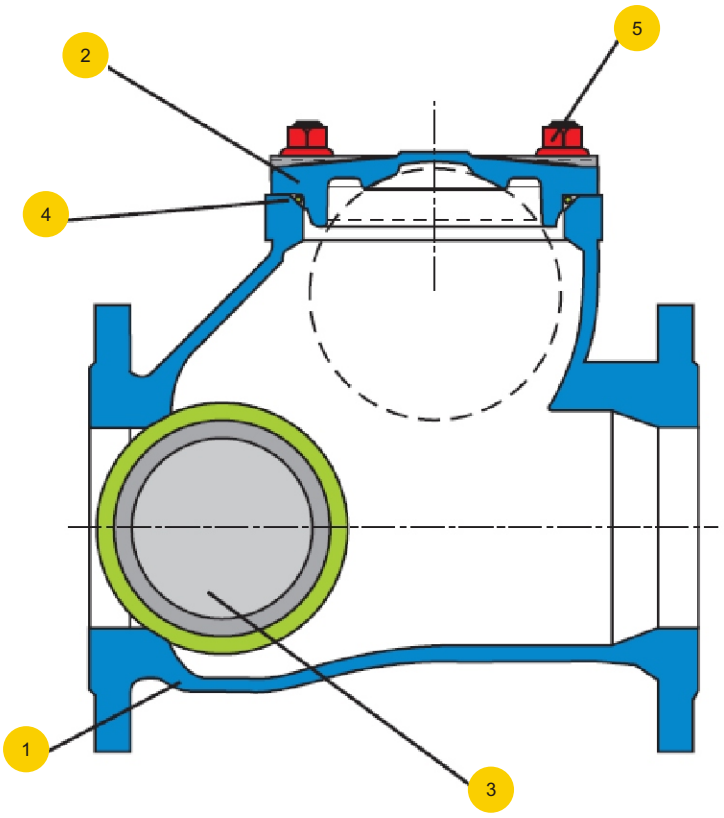

	body material	B
	type	55
1	body	EN- GJS- 400-15 5.3106 (ex.JS 1030)
2	cover	EN- GJS- 400-15 5.3106 (ex.JS 1030)
3	ball	metal/ NBR
4	O - ring	NBR
5	stud bolt +nut	AISI 304
	max. temperature	70°C

Data given can be changed without notice. **Edition 04/2013**

ZETKAMA Spółka Akcyjna
ul. 3 Maja 12
PL 57-410 Ścinawka Średnia

tel. +48 74 8652 174
tel. +48 74 8652 100
fax +48 74 8652 199


e-mail marketing@zetkama.com.pl
www.zetkama.com.pl



figure	400
ends form	flanged Y-type

ZETKAMA

DIMENSIONS

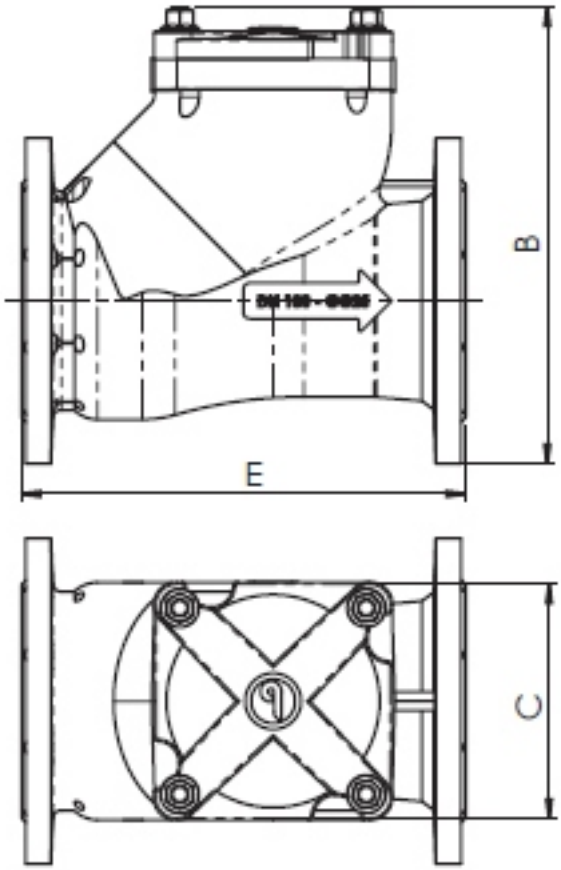

DN	A	B	C	E	Kvs	
mm						kg
50	165	180	95	200	90	8,5
65	185	210	114	240	140	12
80	200	240	128	260	253	15
100	220	285	160	300	369	22
125	250	330	200	350	642	34
150	285	390	230	400	962	45
200	340	480	320	500	1990	80
250	400	600	414	600	3100	135
300	450	680	460	700	4100	200
350	505	800	596	850	5050	300
400	565	1050	690	1100	6500	600

Data given can be changed without notice.

Edition 04/2013

ZETKAMA Spółka Akcyjna
ul. 3 Maja 12
PL 57-410 Ścinawka Średnia

tel. +48 74 8652 174
tel. +48 74 8652 100
fax +48 74 8652 199

e-mail marketing@zetkama.com.pl
www.zetkama.com.pl



figure	400
ends form	flanged Y-type

ZETKAMA

TYPES

figure	body material	nominal diameter DN	nominal pressure PN	type
400	B nodular cast iron EN-GJS-400-15	50-150 mm	C 16bar	55 Tmax 70 °C — metal NBR coated ball, metal/NBR seat, epoxy paint
		200-400 mm	B 10bar	55 Tmax 70 °C — metal NBR coated ball, metal/NBR seat, epoxy paint

ORDERING

To place an order please use our product number (index)

figure	body material	nominal diameter DN	nominal pressure PN	type
400	B	040	C	55

ORDER EXAMPLE 400 B 040 C 55

check valves, ends flanged, form Y-type	400
nodular cast iron EN-GJS-400-15	B
nominal diameter DN40	040
nominal pressure PN16	C
metal NBR coated ball metal/NBR sea	55

Data given can be changed without notice.

Edition 04/2013

ZETKAMA Spółka Akcyjna
ul. 3 Maja 12
PL 57-410 Ścinawka Średnia

tel. +48 74 8652 174
tel. +48 74 8652 100
fax +48 74 8652 199

e-mail marketing@zetkama.com.pl
www.zetkama.com.pl